

Date: 02/2017

Part No: HINO300BUSB

Waste Tyre Reg No. TPREG0031GALU

DISCLAIMER: The information contained in this leaflet is provided as is and without any warranties of any kind, whether expressed or implied including but not limited to, implied warranties of satisfactory quality, fitness for a particular purpose and/or correctness. The contents of this leaflet are for general information purposes only and do not constitute advice. Hino Motors Limited and Hino South Africa do not represent or warrant that the information and/or specifications contained in this leaflet are accurate, complete or current and specifically stipulates that certain vehicle details and specifications contained in this leaflet may differ in available models. Therefore, neither Hino Motors Limited nor Hino South Africa make any warranties or representations regarding the use of the content, details, specifications or information contained in this leaflet in terms of their correctness, accuracy, adequacy, usefulness, timeliness, reliability or otherwise, in each case to the fullest extent permitted by law.

THE NEW HINO 300 BUS

» BACKED BY HINO RELIABILITY AND STRENGTH, THE HINO 300 BUS RANGE PROVIDES A SUITABLE MEDIUM-SIZED PEOPLE CARRIER FOR YOUR BUSINESS.

This new medium-sized bus offers substantial seating capacities, with a low capital cost per passenger, ideal for transporting smaller groups of people such as students and company staff.

+ HINO 300 BUS SERIES

- HINO 300 714 SWB - *25 SEATER
- HINO 300 815 LWB AUTO - *33 SEATER
- HINO 300 915 LWB - *35 SEATER

*Including the driver



FEATURES

COMMUTER BUS WITH WHEELCHAIR ACCESS

THE HINO 300 COMMUTER BUS SERIES INCLUDES A SPECIALISED BUS WITH WHEELCHAIR ACCESS.

This bus has been designed to allow for ease of entrance for disabled passengers. There is the option of either a lower floor area at the rear of the bus with a manual ramp or access via a hydraulic lift ramp. There is also flexibility in choosing the layout best suited for specific operational requirements with more than one wheelchair station equipped with fastening clamps to secure the wheelchair in place while the bus is in motion.


These stations can also be fitted with fold-down chairs, which can be utilised when the disabled section is not in use, maximising the cost effectiveness of each trip.



25 SEATER +

HINO 300 714 SWB


25 seater including the driver

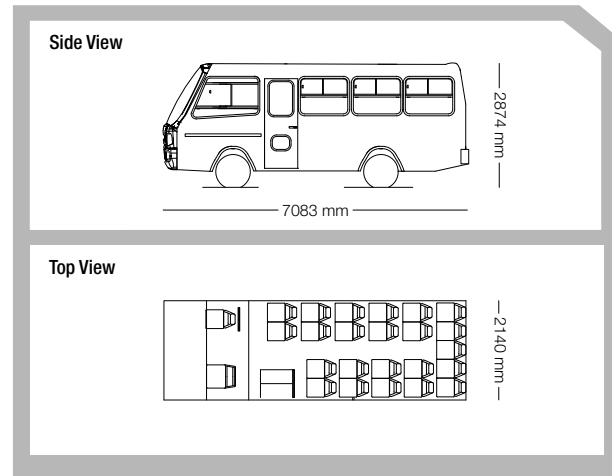

33 SEATER +

HINO 300 815 LWB AUTO


33 seater including the driver

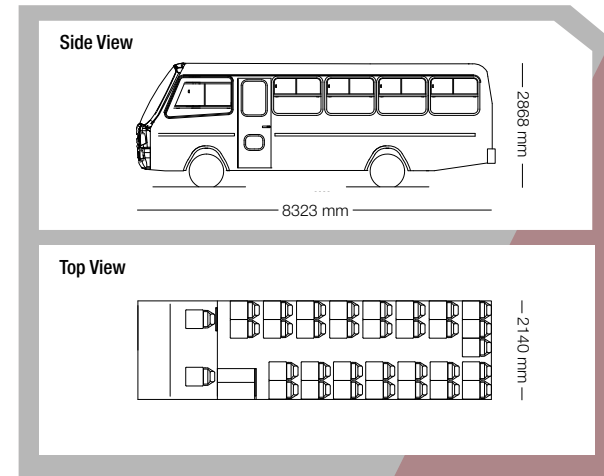

35 SEATER +

HINO 300 915 LWB

35 seater including the driver

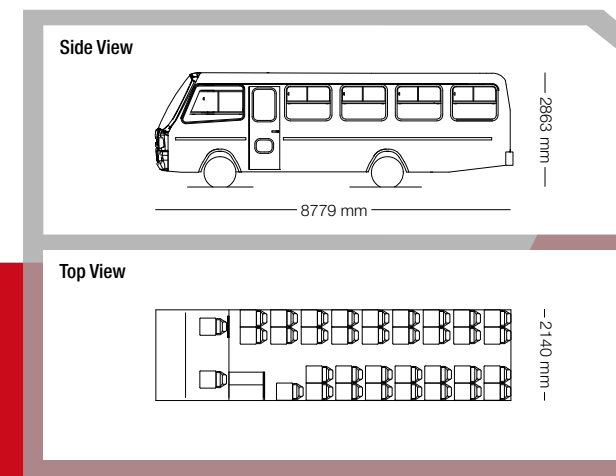

SEAT MATERIAL




PLAIN VINYL

*PRINTED VINYL OPTION AVAILABLE ON REQUEST



CLOTH

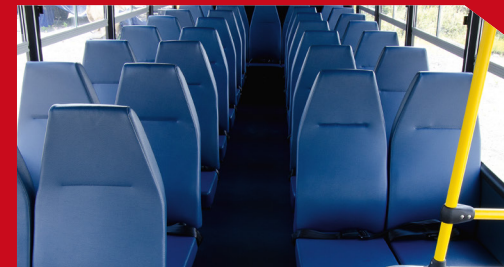

+ STANDARD SPECIFICATION

*CONSTRUCTION:

- Bodywork is of tubular steel construction, "Chromaprep" steel sheeting and G.R.P. manufactured front and rear domes. Super-structure complies with the requirements of SABS 1563:1992 (rollover protection).
- The vehicle body complies with the requirements of the "Compulsory Vehicle Standard" issued by the SABS; and the Road Traffic Act No. 29 of 1989 and Regulations as updated.
- Two external rear-view mirrors.
- Mud flaps – all wheels.
- Windscreen wipers and windscreen washer.
- Spare wheel carrier – as supplied with chassis.
- Swing out battery carrier in separate lockable body side locker, incorporating a toolbox.
- GRP moulded front and rear bumper.
- Number plate holders.
- Interior ceiling lighting.
- Emergency Exit roof hatch.
- Slam-type passenger door in wheelbase.
- Drivers door.
- SABS approved chevron plate at rear end of body and SABS reflective tape on sides.

*Construction of the bus body complies with NRCS standards

PAINTING:

- Exterior body is prepared with Durathane K etch primer and the finishing coat in Durathane K enamel in white.

RUST PROOFING/CORROSION PROTECTION FOR 3 YEARS:

- Corrosion protection in the window openings in the framework and application of a good quality water repellant sealer between the window frame rubber and the bodywork is applied.
- All hollow steel sections are dipped in acid to remove scale, washed in clean water and dipped in a self-etching primer. Tectyl 506EH is sprayed on the outside of the framework and inside hollow sections before outside cladding is applied. An etch primer is applied to all surfaces where steel makes contact with steel. The undercarriage is rubberized with Tectyl 121B.

WINDOWS:

- Material used for windscreens – **Clear** Laminated Safety Glass.
- Material used for other windows – **Tinted** Toughened Safety Glass.
- Side windows – aluminum frames front to back sliding type.

- The complete dashboard console, lamps and electrical equipment is utilised from the cab/cowl and reinstalled in the bus.
- Interior ceiling and panels below windows will consist of 3.2 mm (formica-type) timber board.
- The entire floor is covered with PVC-based flexible sheeting designed for critical high wear applications. The wear surface incorporates a heavy emboss, ensuring excellent non-slip properties. The floor covering will be standard PVC

- The entrance steps will be illuminated with a step light.
- Modesty screen and partition behind driver.
- Two sun visors.
- Full length hand rail.
- 2.5 Dry Chemical Powder fire extinguisher.
- Heater demister for windscreen.
- Re-install cab radio.
- Lap belts on all seats.

Individual split-back seats in vinyl:

- The seat frames are of steel tubular construction, powder-coated, and is fitted in accordance with an approved layout. Seats are designed to provide the best comfort and safety features. All seats have been tested in accordance with SABS test specification 1564 of 1992.

+ OPTIONAL EXTRAS

(Available on request)

- Seats: seat type and material.
- GRP interior with LED strip lights.
- Floor material.
- Steel perforated parcel shelves.
- Luggage lockers.
- Roof mounted air conditioner with fixed or parcel shelf ducting (covered in cloth or vinyl).
- PA system.
- Entertainment system.
- Safety belts – retractable lap belts or 3 point safety belts.
- Wheelchair lift with wheelchair stations.
- Fire Extinguishers – 4.5 kg or 9 kg DCP with bracket.
- Towbar and plug.
- Curtains.
- Saloon heaters.
- Fridge/freezer.

SPECIFICATIONS+

		Hino 300 714 SWB	Hino 300 815 LWB Auto	Hino 300 915 LWB					
Dimensions (mm)	FT - Front Track	1655	1655	1655	Service Brakes	ABS	Yes	Yes	Yes
	MGC - Minimum Ground Clearance	210	215	200		Brake System: Front	Drum	Drum	Drum
	RT - Rear Track	1520	1520	1590	Steering	Brake System: Rear	Drum	Drum	Drum
	WB - Wheel Base Std	3430	4200	4200		Turning radius between kerbs (mm)	6200	7400	7400
Engine	Model	N04C - VA	N04C - VB	N04C - VB	Transmission	Synchromesh or Automatic	Synchromesh	Automatic	Synchromesh
	4 Stroke Compression Ignition	Yes	Yes	Yes		Gear Ratio 1-top gear	4.981 - 0.738	3.742 - 0.634	5.979 - 0.759
	Aspiration	Turbo Intercooled	Turbo Intercooled	Turbo Intercooled		Gearshift Operation	Mechanical	Automatic	Mechanical
	Bore x Stroke	104 x 118	104 x 118	104 x 118		Make	Hino	Hino	Hino
	Capacity (cc)	4009	4009	4009		Model	M550	A860E	MY6S
	Euro Emission Status	Euro 3	Euro 3	Euro 3		Number of Forward Gears	5	6	6
	Number of Cylinders	4	4	4		Reverse Ratio	4.625	3.697	5.701
	Power (EEC/ISO NET) (kw@rpm)	100 @ 2500	110 @ 2800	110 @ 2800		Attachment	6 Stud Disc Wheel	6 Stud Disc Wheel	6 Stud Disc Wheel
	Torque (Nm@rpm)	392 @ 1600	420 @ 1400	420 @ 1400		Number of Wheels Including Spare	7	7	7
						Spare Wheel Carrier Location	Rear Chassis	Rear Chassis	Rear Chassis
Mass Data (kg)	A - Front	3100	3100	3100		Tyre Construction	Tubeless	Tubeless	Tubeless
	A - Rear	5100	5500	6200		Tyre Size	215/75R17.5	215/75R17.5	215/75R17.5
	D/T	8300	9100	10300		Load/Speed Rating	126/124	126/124	126/124
	GCM	8300	9100	10300		Wheel Size	17.5x6.00	17.5x6.00	17.5x6.00
	GVM	6500	7300	8500		Wheel Type	Single Piece Steel	Single Piece Steel	Single Piece Steel
	V - Rating	6500	7300	8500		Safety & Security	Transponder Key Immobiliser	Std	Std
	Geared Speed-km/h (S/L Regulation)	100	100	100			Microdot Vehicle Identification	Std	Std
Front Axle	Type	Reversed Elliot 'I' Beam	Reversed Elliot 'I' Beam	Reversed Elliot 'I' Beam	Aftersales	Service Intervals*	20 000 kms 24 Months Unlimited kms	20 000 kms 24 Months Unlimited kms	20 000 kms 24 Months Unlimited kms
Rear Axle	Housing Type	Full Floating	Full Floating	Full Floating		Warranty	24 Months Unlimited kms	24 Months Unlimited kms	24 Months Unlimited kms
	Ratio	4.625	5.125	4.875					
	Type	Single Reduction Hypoid	Single Reduction Hypoid	Single Reduction Hypoid	* Please refer to HinoCare disclaimer				

HINO VALUE-ADDED SERVICES

DISCOVER THE ROAD AHEAD WITH HINO BUSES

» EVERY HINO BUS THAT ROLLS OFF THE ASSEMBLY LINE IS BACKED BY A HISTORY OF QUALITY, DURABILITY AND RELIABILITY. WE WORK HARD TO KEEP YOU ON THE ROAD, NO MATTER WHERE THE ROAD AHEAD WILL TAKE YOU. WE’RE BEHIND YOU, EVERY STEP OF THE WAY, BACKING YOU WITH ONE OF THE LARGEST DEALER SUPPORT NETWORKS IN SOUTH AFRICA. WE ARE CONSTANTLY INNOVATING AND CREATING NEW TECHNOLOGY TO DO THE JOB BETTER. WELCOME TO THE HINO FAMILY. TRUST US TO GET THE JOB DONE RIGHT, FIRST TIME, EVERY TIME.



+ WARRANTY PERIOD

- 300 series chassis – 24 months, unlimited kms
- Bus body (structural defects) – 36 months, unlimited kms
- Parts and components attached to main body structure (excluding consumables) – 12 months, unlimited kms

+ 24-HOUR ROADSIDE ASSISTANCE

- Hino dealer service and parts assistance
- Hino’s Dealer Network is more than 50 strong in Southern Africa
- 24-hour call centre 0800 878 257 (0800 TRUCKS)
- Technically-trained staff for breakdown assistance
- Roadside security – in the event that your vehicle breaks down in an unsafe area
- Medical Assistance

+ SERVICE INTERVALS

- 300 Series – 20 000 kms*
- * Dependent on application and operating conditions. Speak to your Hino Dealer for more information

+ MAINTENANCE AND SERVICE PLANS

- These can be tailor-made to your requirements
- Speak to your Hino Dealer for more information

+ TOWING ASSISTANCE

- Recovery towing services to the nearest Hino Dealer for repairs or to a safe location